



Shown in Midnight Black

Vista® AR

Architectural Shingles - Algae & Impact Resistant

Vista® AR [algae resistant] shingles are made with our industry-leading **NEX® Polymer Modified [Rubberized] Asphalt**, an innovative technology that uses rubber polymers to strengthen and rubberize the asphalt core of the shingle for superior all-weather resilience, durability, and impact resistance.

Vista® shingles are also sustainable. They include *upcycled* polymers from used tires and plastic bags, and smog-reducing granules that help clean the air.

Sustainability without sacrificing performance.

QUICK SPECS*

Impact Rating	Class 3
Shingle Warranty	Limited Lifetime
Non-prorated Period	12 Years
Algae Warranty	12 Years
Limited Wind Warranty	110 MPH / 177 KPH
Enhanced Wind Warranty	130 MPH / 209 KPH

WHAT OTHERS SAY

"The homeowner wanted a 'green' alternative with some longevity. We told her about Malarkey's Vista shingle - recycled materials, smog-reducing granules - and they were sold. Few things make me happier than installing products I know stand up to the test of time."
- King's Forest Construction, Canada



MADE BETTER

Up to 2x Larger Nailing Area
Up to 50% More Adhesive Bonds
2x Rain Seals

LAST LONGER

Up to 25% Greater Tear Strength
Up to 65% Greater Granule Adhesion
Class 3 Impact Rating

MORE SUSTAINABLE (PER ROOF)

Upcycles ~5 Rubber Tires
Upcycles ~3,200 Plastic Bags
Cleans Air Pollution like ~2 Trees



Performance Engineered, Sustainably Designed

NEX® RUBBERIZED ASPHALT

Asphalt core of shingle is rubberized with synthetic rubber polymers (SBS) to enhance shingle strength, flexibility, and resilience. Class 3 impact rating. *Insurance discounts may apply.*

UPCYCLED RUBBER & PLASTIC

Polymers from recycled rubber and plastic improve shingle durability while diverting the equivalent of ~5 rubber tires and ~3,200 plastic bags from the landfill per roof.¹

MORE ADHESIVE BONDS


Synthetic rubber adhesive (SEBS) resists dry-out and delivers extreme seal-down strength against high winds, wind-driven rain, and delamination. Up to 50% more laminate bonds and 2X the rain seals of standard shingles.

3M™ SMOG-REDUCING GRANULES

Clean the air of emission pollutants. Each roof has the smog-fighting potential of ~2 trees.²

3M™ COPPER GRANULES

Reduce black streaks caused by algae growth. 12 year algae warranty.

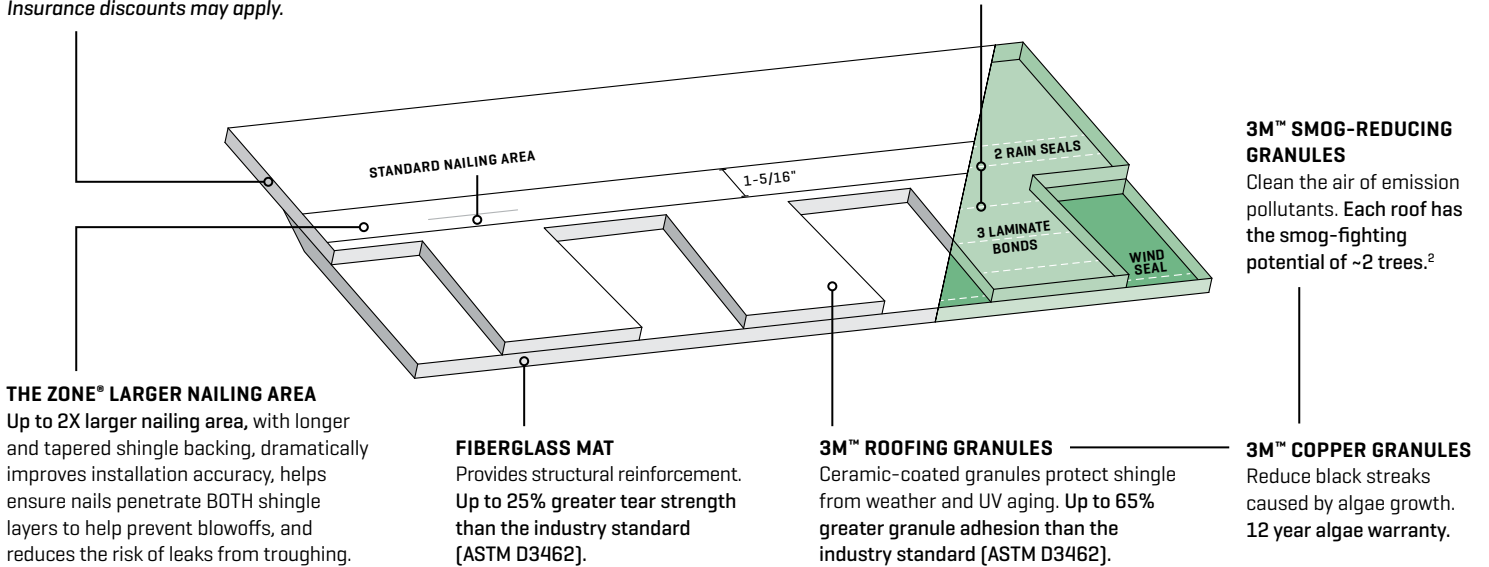

THE ZONE® LARGER NAILING AREA

Up to 2X larger nailing area, with longer and tapered shingle backing, dramatically improves installation accuracy, helps ensure nails penetrate BOTH shingle layers to help prevent blowoffs, and reduces the risk of leaks from troughing.

FIBERGLASS MAT

Provides structural reinforcement. Up to 25% greater tear strength than the industry standard (ASTM D3462).

3M™ ROOFING GRANULES

Ceramic-coated granules protect shingle from weather and UV aging. Up to 65% greater granule adhesion than the industry standard (ASTM D3462).



3M™ Smog-Reducing Granules



MEETS CSA A123.5 STANDARDS

¹ Assumes roof of 30 squares.

² Assumes roof of 30 squares. Source: Lawrence Berkeley National Laboratory and 3M.

Test Compliance – ASTM D7158 Class H, ASTM D3462, ASTM D3161 Class F, ASTM D3018 Type I, ASTM E108 Class A Fire Rating, UL 2218 Class 3, CSA A123.5, ICC Approval – ESR-3150 and ICC-ES AC438.

Disclaimer: Photographs of shingles may not accurately represent their true color or the variations of color blends that will appear on the roof. **Before installation, five or six shingles should be laid out and reviewed for desired color.** Colors and specifications subject to change without notice. Shingle colors not available in all regions.

+ For complete information on all warranties, please reference Malarkey's **Shingle and Accessory Warranty available at www.malarkeyroofing.com/warranties.**

www.malarkeyroofing.com
800-545-1191
Made in Portland, OR

This version supersedes all previous versions.
Rev. 04/22

